


Σ = Girth

## D.L. 150 - Doublelock Panel


Sheets/Coil Used:

Mechanically Seamed

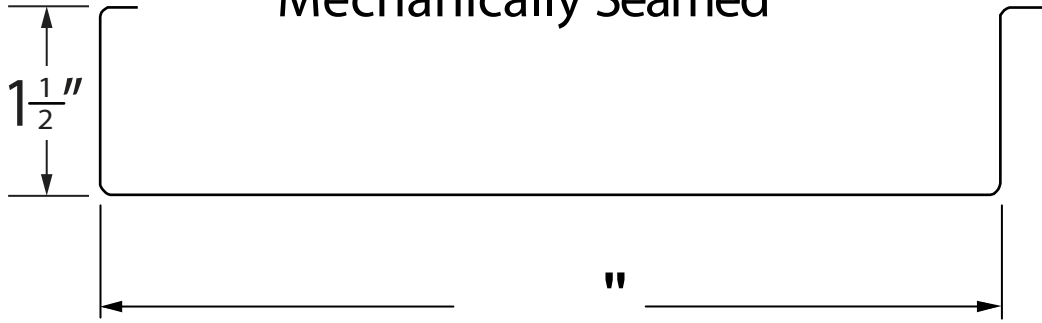

PANEL LENGTH/QUANTITIES

Panel Curving Available

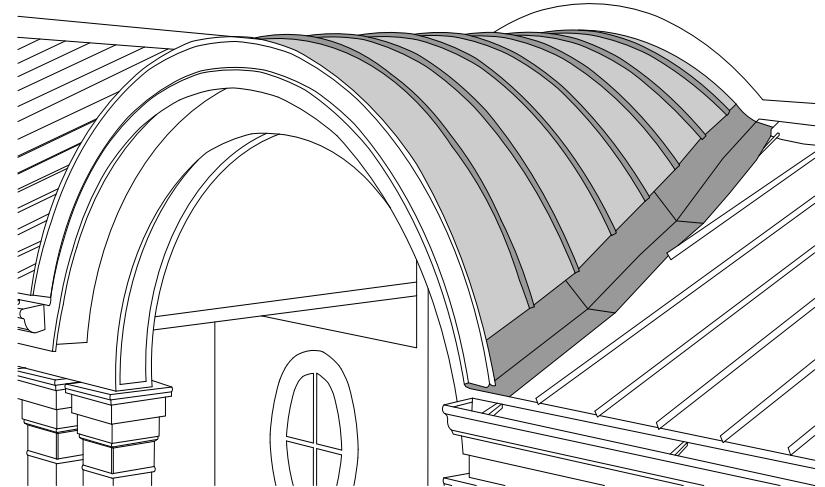

Radius: \_\_\_\_\_

Clip QTY: \_\_\_\_\_

### MATERIAL

Min Pitch =  $\frac{1}{12}$

- ☐ Aluminum Kynar .032 or \_\_\_\_\_ ☐ Color \_\_\_\_\_  
☐ Galvanized G-90 24 Gauge  
☐ Painted Steel Kynar 24/26Gauge ☐ Color \_\_\_\_\_  
☐ Copper 16/20 oz or \_\_\_\_\_  
☐ Patina 3000 16/20 oz \_\_\_\_\_  
☐ Brown Copper 16/20 oz \_\_\_\_\_ ☐ Light ☐ Dark  
☐ Zinc \_\_\_\_\_

### CUSTOMER APPROVAL

☐ Approved for Fabrication

Authorized Customer Signature \_\_\_\_\_

Job Address: \_\_\_\_\_

PO #: \_\_\_\_\_

Date Ordered: \_\_\_\_\_

Order taken by: \_\_\_\_\_

Phone #: \_\_\_\_\_



**CHICAGO METAL SUPPLY**

and fabrication, inc.

*For a Timeless Look*

4940 W. Grand Ave. P: (773) 227-6200

Chicago, IL 60639 F: (773) 227-1700

info@chicagometalsupply.com

Completed By: \_\_\_\_\_

Estimate #: \_\_\_\_\_